
Foxi

Online Tracking

Advanced online tracking system

User Manual



Table Of Content

1. Features	3
2. Log In	4
3. Connect your device	5
4. Main Screen	6
5. Main Menu	7
5.1 Online Tracking.....	7
5.2 Settings.....	7
5.3 Interest Point	8
5.4 Geo-Fence.....	8-9
5.5 History.....	9
5.6 Reports	10
5.7 Map.....	10
5.8 Measure Distance.....	11
5.9 Chart.....	11
5.10 Manage.....	12
6. Map Overview	12
7. Device Information	13
8. Alerts	13-14
9. Your Comments	15

1. Features

The online tracking system has variety of features. This is the list:


- Supported languages: Hebrew, English, German and French.
- Watch your device online, and see the path track.
- Watch unlimited devices simultaneously.
- View history of your devices, up to three months back.
- View device's speed, current address, latitude, longitude.
- View reports for speed, time, location and alerts.
- View your device's kilometrage.
- Set virtual fence for your device, to keep it close to you.
- Get alerts by email for any activity you like from the device.
- Measure distance on map from one destination to another.
- View maps as flat, satellite or street view.
- Export reports as PDF or XLS.

2. Log In

Step 1: log in to the platform: <http://www.gp-st.com>

You can also log in to the platform using our application "Foxi". You can download from Apple store or Google play.

Step 2: Select language and insert the user id and password you received from your supplier.



The image shows a login form for "GPS WEB TRACKING". The form has a dark blue header with the text "GPS WEB TRACKING" in white. Below the header, there are two input fields: "User ID:" and "Password:". Below the password field, there is a language selection dropdown menu with "English" selected and highlighted in yellow. Below the language selection, there is a checkbox labeled "Remember me" which is checked. At the bottom of the form, there is a green "Login" button.

Welcome to the Tracking Platform!

3. Connect your device

As default, your device is not connected to the online platform.

Please make sure your SIM card has data plan activated and also make sure you set the right cellular provider according to your device's user manual.

The online platform works with Foxi watch, Small Track, iTrack and iTrack Plus.

You can set the device to connect the online platform using SMS or using our "Foxi" application.

Foxi Watch

You need to send the following SMS, without spaces or parenthesis:

10,(Time in seconds for interval data)

Start here

For example: 10,30 for every 30 seconds

Cancel command: 10,0

Interval should be between 30 and 90 seconds.

Small Track

You need to send the following SMS, without spaces or parenthesis:

S1,(APN for cellular carrier,username,password)

Start here

For example: S1,uinternet for Orange Israel.

Cancel command: S1,0

Time interval is set to 180 seconds as default. You can change the interval from the App.

iTrack / iTrack Plus

You need to send the following SMS, without spaces or parenthesis:

6,(Time in seconds for interval data)

Start here

For example: 6,30 for every 30 seconds

Cancel command: 6,0

Interval should be between 30 and 90 seconds.

4. Main Screen

Here you can see the main screen of the online platform.

1) At the top left you can see your devices in the list.

2) At the bottom left you can see the main menu. More details on the next pages.

3) In the middle, the world map of your devices.

4) At the bottom, you can see full details about location: address, time, alerts etc.

The screenshot shows the 'Real Time Tracking' application interface. On the left, there is a panel with a dropdown for 'ID' and 'Name', and a list of trackers. A red '1' is placed over this list. Below the list is a menu with options like 'Settings', 'Interest point', 'History', 'Reports', 'Map', 'Measure Distance', 'Chart', and 'Manage'. A red '2' is placed over the 'Reports' option. The main area is a map showing a location in Ramat Hasharon, Israel, with a red '3' over a marker labeled 'test3'. At the bottom, there is a table with columns for Name, Date, Time, Latitude, Longitude, Speed, Address, ACC, D..., Mileage, and Alarm. A red '4' is placed over the 'Latitude' column. The table contains one row of data for 'test3'.


Name	Date	Time	Latitude	Longit...	Sp...	Address	ACC	D...	Mileage	Alarm	
test3	08/09/20	16:42:10	32.1227	34.83107	0.00	תל אביב יפו, ישראל	Off	24-34	close	76.0KM	No Ala...

5. Main Menu

5.1 Online Tracking

Online tracking shows you the device you purchased. Click on the device from the menu and the map will show you the location.

If the device shown in black color, it means the device is not connected to the platform. If its green color, it's online.

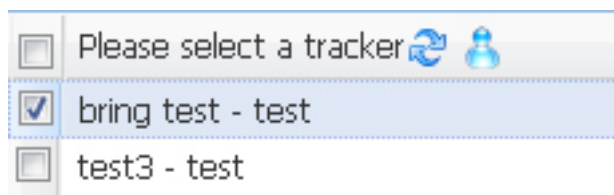


5.2 Settings

The settings menu enables you to control your device's settings.

Those settings can also be set from the Foxi App or by SMS.

You can set admin numbers, speed limit, movement alert, interval time etc.

This settings feature works only with Small Track, iTrack and iTrack Plus.

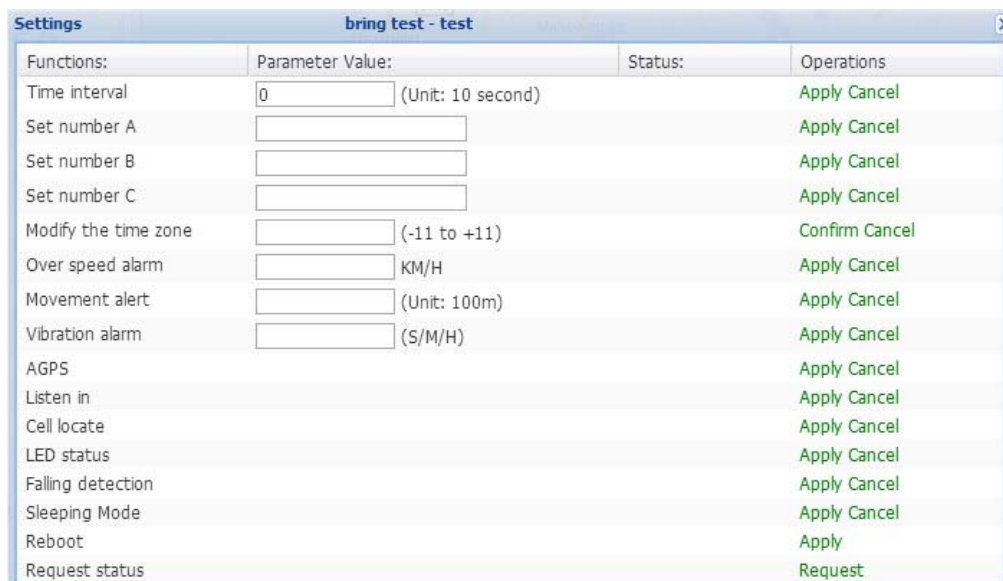


Functions:	Parameter Value:	Status:	Operations
Time interval	<input type="text" value="0"/> (Unit: 10 second)		Apply Cancel
Set number A	<input type="text"/>		Apply Cancel
Set number B	<input type="text"/>		Apply Cancel
Set number C	<input type="text"/>		Apply Cancel
Modify the time zone	<input type="text"/> (-11 to +11)		Confirm Cancel
Over speed alarm	<input type="text"/> KM/H		Apply Cancel
Movement alert	<input type="text"/> (Unit: 100m)		Apply Cancel
Vibration alarm	<input type="text"/> (S/M/H)		Apply Cancel
AGPS			Apply Cancel
Listen in			Apply Cancel
Cell locate			Apply Cancel
LED status			Apply Cancel
Falling detection			Apply Cancel
Sleeping Mode			Apply Cancel
Reboot			Apply
Request status			Request

5.3 Interest Point

Interest point enables you to set points on the map. Those points are "memos" that will appear every time you open the platform.


Select the interest point location, insert text and press OK.

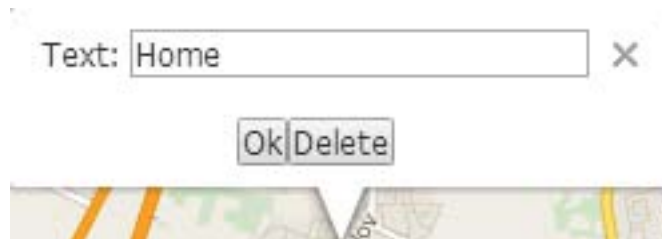

5.4 Geo-Fence

The geo fence enables you to set virtual fence over the map, and get alerts when your device enters or exits the area.

At the left upper corner, press the "Add new geo fence".

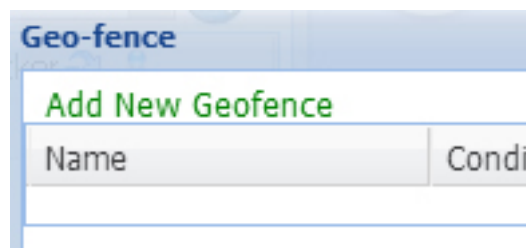

You need to fill the following details:

area name, alarm when leave / enter the range, status and safe time.

The safe time gives the device period of time that entering or exiting the area is allowed. If you wish not to allow at all, set a time between 10:00 and 10:01.

Add New Geofence

Name:

Select range from map:

 Mouse left click on the map, after choose the range then left click again.

Alarm when:

State:

Safe times: between: and:

After inserting all the details, press "Select range from map" to select the designated area. With your mouse cursor you can draw a green field that you wish to cover.



You can move the white circles to make the exact area, and press "Yes" to finish editing.

5.5 History

In this screen you can see the history of your device's location.

The system keeps the data up to three months back.

Select start and end time and press the search button. The system will look at the history database to show you the information on the map. Press the play button to start the trace.

History

Start:

End:


Mileage: 0KM Play Speed: 1

Search result: [Previous](#) 0/0 [Next](#)

5.6 Reports

The report system enables you to watch the data for your device.

Select start and end time, filter your desired data and click the search button.

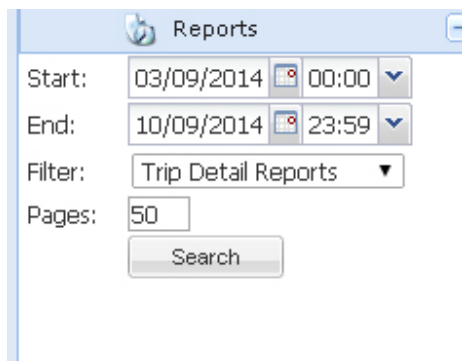

The screenshot shows a 'Reports' window with the following fields: 'Start' set to 03/09/2014 00:00, 'End' set to 10/09/2014 23:59, 'Filter' set to 'Trip Detail Reports', and 'Pages' set to 50. A 'Search' button is located below the 'Pages' field.

A screen will pop up showing you the relevant information. You can scroll down to see the "Export" data to pdf or excel.

Pages 1 / 1 Previous Next [Export Excel](#) [Exportar PDF](#)

5.7 Map

The map gives you the ability to set two coordinates, latitude and longitude and see the real location on the map.

Insert the two numbers and press "Locate"




The screenshot shows a 'Please Enter:' section with two input fields: 'Lat : 32.06823' and 'Long: 34.77009'. Below these fields is a 'Locate' button. At the bottom, the address is displayed as 'Nahalat Binyamin Street 13, Tel Aviv-Yafo, Israel'.

5.8 Measure Distance

The measure distance feature enables you to place two or more points on the map, and the platform will measure the actual distance between them.

Use your left button on the mouse to place measure points and right click to finish. The system will show you the distance

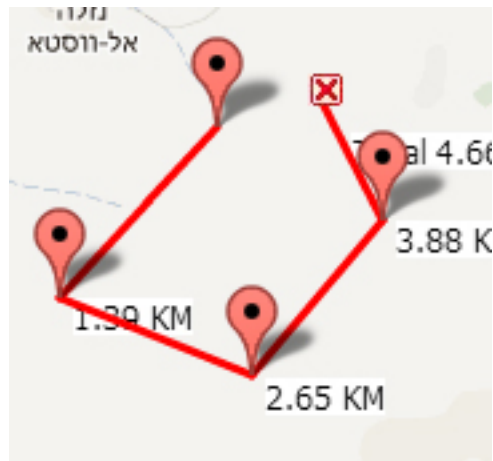

5.9 Chart

In this area, you can view chart graph of your device.

You can choose time vs. distance or time vs. speed.

Select start and end point and the system will show you the graph.



5.10 Manage

Here you can change your platform password.

You need to insert your old password and your new password twice.


You can not change your username for the platform.



The screenshot shows a dialog box titled "Change Password" with a close button (X) in the top right corner. It contains three input fields: "Old Password:", "New Password", and "Confirm New Password:". Below the input fields are two buttons: "Submit" and "Cancel".

6. Map Overview

The map shows your device:

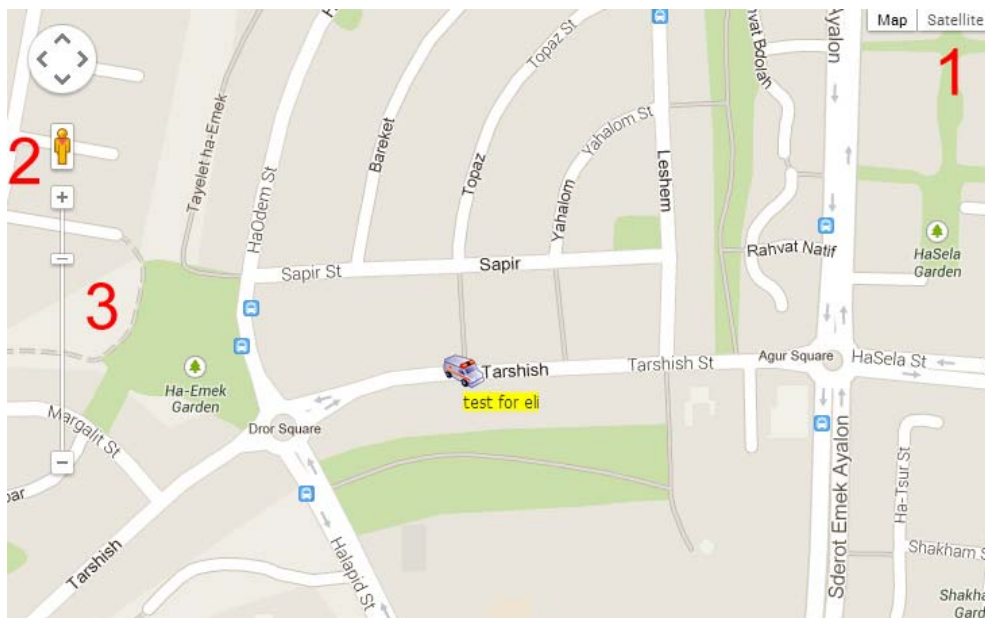


1 – You can change the outlook. Regular map to satellite view.

2 – The orange man shows the street view. (Drag the man to the map)

3 – Use the scrolled to zoom in and out from the map.

7. Device information

The bottom part shows more information on the selected device


Name	Date	Time	Latitude	Longit...	Sp...	Address	ACC	D...	Mileage	Alarm	
bring test	09/09/20:	22:54:31	32.31247:	34.93521	4.00	Nahal Sorek 17, Kfar \	Off	close	0.0KM	 No Ala...	

The platform updates this line every time the server gets new information from your device. You can see data, time, coordinates, address etc.

8. Alerts


Our platform also supports alert system.

At the right bottom you can see an icon shown in the picture:

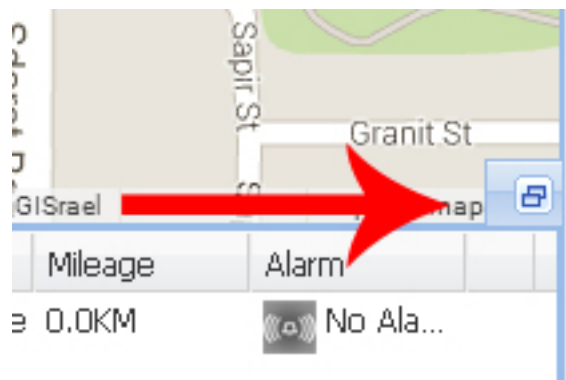

This icon opens the alerts screen.

You can get alerts for low battery, geo-fence, SOS, external power lost, over speed etc.

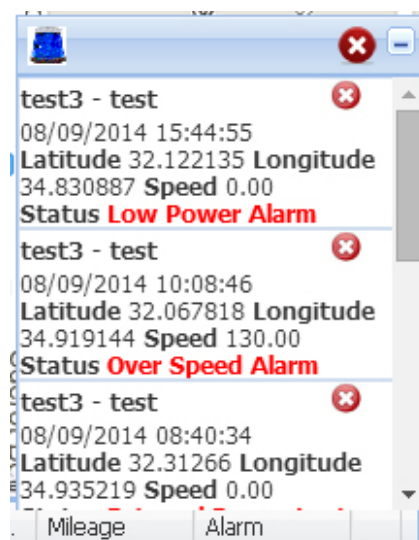

The alerts information is shown by this way:

Device's name, time of alert, coordinates and alert type.

To discard the alert, press the X button next to it.

The alerts can be sent also to your email address. Please contact Foxi to connect your email to the alert system. If you use internet explorer browser, you will be able to ear siren sound when alert arrives.

Foxi

Online Tracking

Advanced online tracking system

© All rights reserved • Headquarters: Kfar Yona, Israel
• Office phone: +972-77-5563137 • Mobile: +972-50-7730018 • Fax: 972-77-4702782 •
Email: support@foxiwatch.com • Website: <http://www.foxiwatch.com>